

## INTRODUCTION

Aksa is committed to providing the most effective solution to the Data Center industry with the power it takes from engineering, production, distribution, and customer-oriented experience and knowledge. We are constantly improving designs, products and infrastructure to offer the highest level of reliability for Emergency Power Systems. While serving the industry in hundreds of countries Globally, we design our products and systems in line with the needs of Data Center practitioners at the center of our focus. Aksa generator group provides continuity, reliability and ideal performance for Data Centers.

### Power

3 Phase, 50 Hz, PF 0.8

VOLTAGE (V)	STANDBY RATING (ESP)		DCC RATING		DCC Current (A)
	kW	kVA	kW	kVA	
400/231	2000	2500	1800	2250	3247.69

**Data Center Continuous (DCC)** The maximum power which a generating set is capable of delivering while supplying a variable or continuous electrical load and during unlimited run hours. Depending on the sites to supply and the availability of utility.

DCC:Data Center Continuous Power ratings, as defined, meet the Uptime Institute Tier III and IV requirements as detailed in the Uptime Institute Tier Standards: Topology. The power ratings of Standby and DCC data, given above have been identified according to conditions of 100kPa barometric pressure (110m. altitude), 25 C ambient temperature.

\* Data tolerance %+- 5.

## General Characteristics

Model Name	APD 2501 M
Frequency (Hz)	50
Fuel Type	Diesel
Engine Made and Model	MITSUBISHI S16R2-PTAW
Alternator Made and Model	S7L1D-J4
Control Panel Model	InteliGen NT

## ENGINE SPECIFICATIONS

Engine	MITSUBISHI
Engine Model	S16R2-PTAW
Number of Cylinder (L)	16 cylinders - V type
Bore (mm.)	170
Stroke (mm.)	220
Displacement (lt.)	79.9
Aspiration	Turbo Charged and Charge Air Cooled
Compression Ratio	14.0:1
Engine Speed (rpm)	1500



Oil Capacity (Total With Filter) (lt)	290
Standby Power (kW/HP)	2167/2905
DCC Rating (kW/HP)	1960/2627
Block Heater QTY	2
Block Heater Power (Watt)	3000
Fuel Type	Diesel
Injection Type and System	Direct
Type of Fuel Pump	Mitsubishi PS8x2 (In-Line)
Governor System	Electronic
Operating Voltage (Vdc)	24 Vdc
Battery and Capacity (Qty/Ah) / CCA	4x 200 / 1300
Charge Alternator (A)	30
Intake Air Flow (DCC) (m3/min.)	168
Cooling Method	Water Cooled
Cooling Fan Air Flow (m3/min)	2265.6
Coolant Capacity (engine only / with radiator) (lt)	41.5/442
Air Filter	Dry Type
Fuel Cons. Prime With %100 Load (lt/hr)	478
Fuel Cons. Prime With %75 Load (lt/hr)	362
Fuel Cons. Prime With %50 Load (lt/hr)	242

### ALTERNATOR CHARACTERISTICS

Manufacturer	Stamford
Alternator Made and Model	S7L1D-J4
Frequency (Hz)	50
Power (kVA)	2500
VOLTAGE (V)	400
Phase	3
A.V.R.	MX322
Voltage Regulation	(+/-)0.5%
Insulation System	H
Protection	IP23
Rated Power Factor	0.8
WEIGHT COMP. GENERATOR (Kg)	4515
COOLING AIR (m <sup>3</sup> /min)	186


### Open Gen.Set Dimensions (mm)

LENGTH	6146
WIDTH	2380
HEIGHT	3392
DRY WEIGHT (kg.)	14700
TANK CAPACITY (lt.)	2000



### Control Panel

Control Module	Comap
Control Module Model	InteliGen NT
Communication Ports	MODBUS

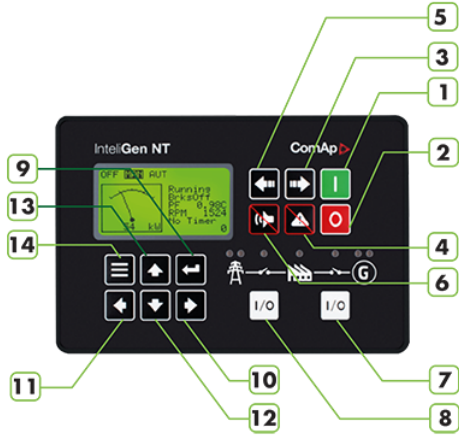

- 1.Start
- 2.Stop
- 3.Mode > OFF > MAN > AUT > TEST
- 4.Fault Reset
- 5.Mode < OFF < MAN < AUT < TEST
- 6.Horn Reset
- 7.GCB control (Open/Close)
- 8.MCB control (Open/Close)
- 9.Enter
- 10.5% Increase of edited setpoint's value.
- 11.5% decrease of edited setpoint's value.
- 12.Decrease setpoint value.
- 13.Increase setpoint value.
- 14.Escape.

### Devices

InteliGen NT Auto Mains Failure control module Static battery charger Emergency stop push button and fuses for control circuits

### CONSTRUCTION and FINISH

- Components installed in sheet steel enclosure.
- Phosphate chemical, pre-coating of steel provides corrosion resistant surface
- Polyester composite powder topcoat forms high gloss and extremely durable finish
- Lockable hinged panel door provides for easy component access

### INSTALLATION

Control panel is mounted generating set baseframe on robust steel stand or power module. Located at side of generating set with properly panel visibility.

### GENERATING SET CONTROL UNIT

- 195Vac to 264Vac input volt-age range
- 45Hz to 440Hz input supply frequency range
- Capability to work direct from 240Vdc to 365Vdc sup-ply voltage
- 27.6Vdc factory set DC out-put terminal voltage (option up to 29.4Vdc)
- 5.0Adc continuous output current into load
- Capability to work continu-ously into short-circuit
- Parallel connection for higher output current rating and redundant operation
- Series connection capability for higher output voltage requirements
- No cooling fans used for high operational reliability
- Aluminum alloy case for ro-bust handling and easy mounting



**STANDARD SPECIFICATIONS**

- Comprehensive gen-set controller for both single and multiple gensets Parallel operation up to 32 gen-sets operating in standby or paralleling modes
- To be used in conjunction with detachable colour displays IntelliVision 5 or IntelliVision 8
- Support of engines with ECU (Electronic Control Unit)
- Complete integrated gen-set solution and signal sharing via CAN bus – minimum external components needed
- Many communication options – easy remote supervising and servicing
- Load sharing and VAr sharing via CAN Virtual shared inputs and outputs via CAN Support of wide range of applications
- Single or multiple gen-sets in parallel to mains operation with automatic back up function, multiple island operation
- Advanced power management function
- Customizable load control in parallel to mains
- Wide range of ECU support
- Highly configurable
- Timers, Internal PLC, Force values and more
- Active e-mail messaging and SMS with optional communication module
- Stop, Manual, Automatic, Test, Start, Silent / Lamp test,
- Automatic synchronization and power control AMF function, Baseload, Import / Export, Peak shaving, Voltage and PF kontrol (AVR)
- True RMS (TRMS) is used with Voltage, Current and Power measurement

**Instruments**

<b>ENGINE</b>	<b>PROTECTION CIRCUITS</b>	<b>STOP ALARMS</b>
Engine Speed	Charge failure	Start failure
Oil Pressure	Low Battery Voltage	Emergency stop
Water Temperature	Stop Failure	Low oil pressure
Engine Runing Hours	Low Fuel Level (ops)	High engine temperature
Battery Voltage	Overload kW	Low water level
Maintenance Plan	Reverse phase sequence	Low / High engine speed
<b>GENERATOR</b>	<b>PRE-ALARMS</b>	Low / High generator frequency
Voltage (L-L, L-N)	Low Oil Pressure	Low / High generator voltage
Current (L1-L2-L3)	High engine temperature	Oil pressure sensor open circuit
Frequency	Low Engine Temperature	Phase direction
Earth leakage	Low / High engine speed	
kW	Low / High generator frequency	
Power Factor	Low / High generator voltage	
kVAr	ECU warning	
kWh, kVAh, kVArh		
<b>MAINS</b>		
Voltage (L-L, L-N)		
Frequency		

Manufacturer reserves the right to make change in the model, technical specifications, color, equipment, accessories and images without prior notice. (08.12.2021)



### Options

- High oil temperature - Shutdown
- Low fuel level - Shutdown
- Low fuel level - Alarm
- High fuel level - Alarm
- Customizable load control in parallel with the network
- Wide range of ECU support
- Highly configurable
- Timers, Internal PLC, Force values and more are compatible with ComAp's IntelliVision displays
- Active e-mail messaging and SMS with communication module

### Standards

- EN 60068-2-6 ed.2:2008
- EN 60068-2-30, May 2000
- EN 61010-1:2003
- EN 60068-2-27 ed.2:2010
- EN 60068-2-64
- VDE AR N 4105:2011; DIN VDE V 0124-100:2012 (Cl. 5.3.3, 5.3.4, 5.3.6, 5.4.3, 5.4.5, 5.4.6, 5.5)
- BDEW Medium-Voltage Guideline: 2008; FGW TR3:2013 (Clauses 4.2.2, 4.2.3, 4.2.4, 4.3.2, 4.3.3, 4.3.4., 4.5, 4.6., 4.7)

### STATIC BATTERY CHARGER

EBC 2405M is designed and optimized for charging all types of Lead Acid batteries (including jell type sealed Lead Acid batteries), protecting the battery and extending its useful life time

EBC 2405M can deliver continuous charging current of 5A into 24V battery system (voltage is set to 27.6Vdc, with an option of up to 29.4Vdc) These battery chargers are designed with performance in mind and special care is taken for protecting and extending the life-time of the battery.

EBC 2405M is designed with "Switched Mode" technology, where the switching transistor has only two states, ON or OFF, which increases the overall efficiency, hence reduces the excess heat dissipation and in return, increasing the device life-time and reliability.

The control system is also designed in such a way that; battery is charged in three stages:

Constant current mode (protecting battery cells)

Constant voltage mode (reducing the charge current)

Float charge (compensation of internal self-discharge)

Constant current mode makes sure that; when the battery is drained down below its rated capacity, the high charge current flow into the battery is limited in order to protect the cells and reduce damage to the plates.

As the battery capacity is recovered, each cell voltage reaches up to 2.30Vdc to 2.45Vdc level, which means that the required charging current starts to reduce.

When the required battery terminal voltage is fully reached, the charger keeps supplying just enough current in order to compensate for the internal self-discharge (float charge). This ensures that the battery can maintain its high charge state and deliver its rated output current, when ever required.



## STANDARD SPECIFICATIONS

- Water cooled diesel engine
- Radiator and belt-driven fan
- Protective cage to prevent rotating and touching hot parts
- Output breaker
- Electric starter and charge alternator
- Battery (lead acid), cables and stand
- Automatic synchronization and power control system (multiple parallel generator)
- Circulation pump (for engine block heater)
- Engine block water heater
- Steel chassis and anti-vibration wedges
- Fuel tank separate from the group (Openset group)
- Flexible fuel connection hoses
- Alternator with single bearing and H insulation class
- Industrial capacity muffler and flexible steel compensator
- Electronic battery charger
- Operating and installation instructions

## OPTIONAL EQUIPMENTS

### ENGINE

- Remote radiator cooling
- Fuel-water separator filter
- Oil heater

### ALTERNATOR

- Anti-condensation heater,
- Bigger Power rate alternator

### CONTROL PANEL

- Continuous parallel system with the network
- Network synchronization system
- Remote communication and control
- Remote alarm panel
- Alarm output relays
- Earth leakage, single generator
- Charging ammeter

**TRANSFER BOARD**

Three or four-pole ATS system

Three or four-pole motorized output breaker

**AUXILIARY EQUIPMENT**

Main Fuel Tank

Automatic or manual fuel filling system

Oil drain, electric pump

Low and high fuel level alarm

Exhaust muffler, critical type

Enclosure cabinet; soundproof type or open area type

Tool kit (for maintenance)

Maintenance kit for 1500/3000 working hours

Antifreeze and engine lubricating oil (for -30 ° C ambient temperature)

**AKSA CERTIFICATES**

- ISO 14001-2004

- TS ISO 8528

- TS ISO 9001-2008

- CE

- SZUTEST

- 2000/14/EC